

**TLM-4550  
DUAL CARTRIDGE RANDOM ACCESS MEMORY**



**FOR THE FIRST TIME  
A RANDOM ACCESS MEMORY  
USING MAGNETIC TAPE**

- Fastest Operation Available
- Automatic Cartridge Loading
- Unique Check-Read-After-Write Capability
- Non-Contact Recording
- Linear Head Positioning
- Extreme Dependability
- Simple Servicing



Figure 1. The Potter RAM, Model TLM-4550.  
Shown with Model ACC-8601 Tape Pack Cartridge



Figure 2. RAM Tape Pack  
Cartridge, Model ACC-8601

**TAPE PACK FEATURES**

- High Capacity — Over 50 Million Bits
- Low Price — Lowest Available
- Complete Data Security
- Interchangeable Cartridges
- Rugged Strength, Sealed Enclosure
- Lightweight — Readily Stacked
- Replaceable Low-Cost Storage Element



## AUTOMATIC CARTRIDGE LOADING — Approximately 15 Seconds!



Operator Selects Tape Pack Cartridge.



Places Cartridge on Loading Carriage.



Presses "LOAD" Pushbutton. Fully Automatic Startup.

Figure 3. Cartridge loading is as simple for the operator as it is possible to make it. A cartridge is placed on the machine carriage; a latch snaps it secure. From this point everything is automatic. The operator simply presses the "LOAD" pushbutton and walks away, leaving the machine to load the cartridge, start

up automatically, and signal the "ready" condition, all within a few seconds. Both cartridges are driven simultaneously and cartridges may be interchanged from one side of the machine to the other, a file of several cartridges, or between machines.

## DRAMATIC STEP FORWARD IN PERFORMANCE CHARACTERISTICS!

Unlike any other machine in its class, the RAM can check-read data immediately after writing. This makes a dramatic difference in the performance characteristic. While other machines are occupied with the extra revolution of the recording medium, necessary to check-read, the RAM has already started the next access. Data throughput rates are enormously improved, and there is no need for the special data sequencing which attempts to minimize latency effects.

The remarkable characteristics of the RAM concept provide advanced performance plus simplified machine design, high reliability and lowest cost per bit stored. This is truly a breakthrough in design approach.

Comparisons between the RAM and other ma-

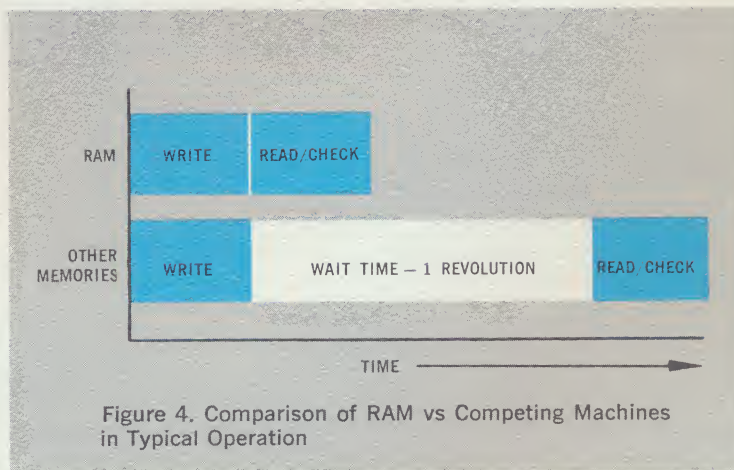


Figure 4. Comparison of RAM vs Competing Machines in Typical Operation

chines show typical operations being accomplished in half the usual time, with cartridge capacity doubled and cost per bit stored reduced to one quarter. In addition, vulnerable recording discs have been replaced by highly shock resistant magnetic tape sealed in rugged Tape Pack cartridges.



The Potter RAM is a cartridge loaded random access system for use with medium and low cost digital computer systems. Typical applications are: inventory control, computer programming, real-time data processing, and mathematical and scientific analyses... wherever rapid access to a volume of information is required, and where the information is too large to be economically accommodated by ferrite core memory systems.

Information is recorded serially in a multiplicity of tracks on loops of tape, and any information may be written or read at random by transmitting address information to the unit together with an appropriate command signal.

All channels have equal storage capacity and equal bit packing density. Thus, "zoned" arrangements of information, as used with disc memories to achieve reasonable storage efficiency, are not required.

The dual-cartridge RAM offers the same on-line capacity and performance capabilities intrinsic in the single-cartridge model, but offers additional operational flexibility. The dual-cartridge RAM is capable of copying partial or entire data content from one cartridge to the other, eliminating the need for two machines where the on-line capacity of one machine is adequate.

#### UNIQUE TAPE PACK CARTRIDGE

The Model TLM-4550 accepts two Potter Model ACC-8601 Tape Pack Cartridges, each of which has a storage capacity of 25.1 million bits of information. The tape loop assembly is totally enclosed within a dust-tight, rigid, aluminum case. An aluminum-on-plastic tambour door on the end of the cartridge case provides passage for the drive mechanism when in use.

The complete cartridge assembly is highly resistant to rough handling. The rectangular form, convenience of handling, and light weight of the cartridge permits stacked storage in minimum space and very easy handling. The absence of close tolerance internal fittings avoid misalignment by careless handling, and the tape loops are inherently not subject to deformation and damage by shock and vibration.

Non-contact Potter high density recording is used in a "write broad-read-narrow" single track configuration. No permanent errors occur and the probability of transient errors is so low as to be a negligible factor.

### PRINCIPLES OF OPERATION

#### THE DRIVE SYSTEM

The loops of high quality digital magnetic recording tape in the cartridge each have an associated drive unit on the machine. Figure 6 shows the position of the tape loop which clears the drive assembly and the head as the cartridge is loaded, with the capstan stationary. When the tape loops are positioned, vacuum

is applied to the buffer chamber above the capstan, deflecting the tape so that its backing surface makes a non-slipping contact with the surface of the capstan, which is now rotating. The tape loop is now in the driving condition as shown in Figure 7.

Of special importance is the fact that the tape flies over the write-read head, maintaining a precise and stable gap between the oxide recording surface and the head profile.

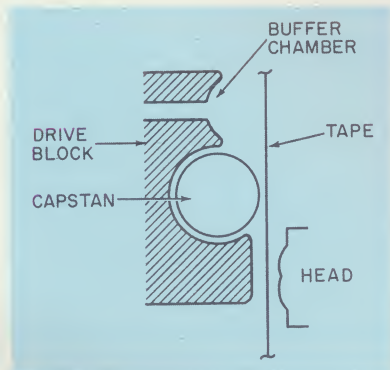


Figure 6. Position of Tape Loop As Cartridge Is Loaded

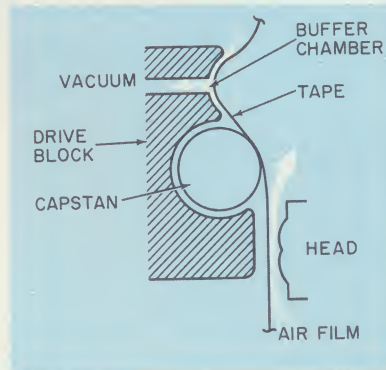


Figure 7. Tape Loop in Driving Condition



Figure 8. The Tape Loop is Entirely Supported on An Air Cushion While in Motion



Figure 5. Potter Tape Pack, Model ACC-8601, Magnetic Tape Loop Configuration



## PRINCIPLES OF OPERATION *continued*

Figure 8 shows, diagrammatically, the fixed air bearings which control the tape loop, at top and bottom. These fixed elements conduct air under pressure to the bearing surfaces which forms a supporting film. Thus the tape loop is entirely supported on an air cushion while it is in motion.

### MULTIPLE DRIVE BLOCKS

The individual drive blocks are arranged in two compact groups on the faceplate of the machine, with a common capstan serving each group. (Figure 9). A

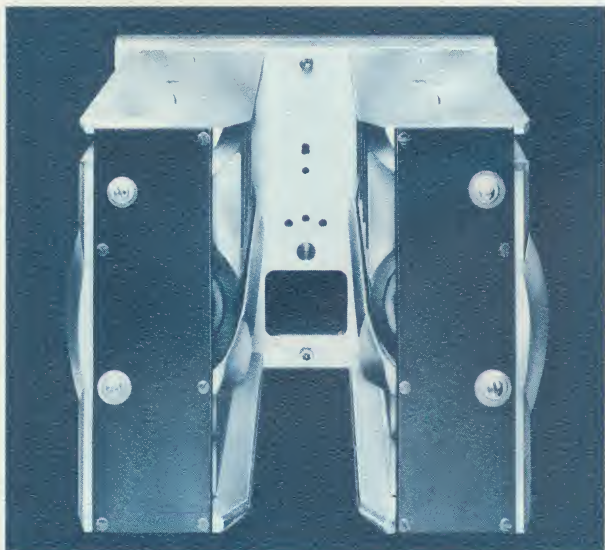


Figure 9. Multiple Drive Block Assembly

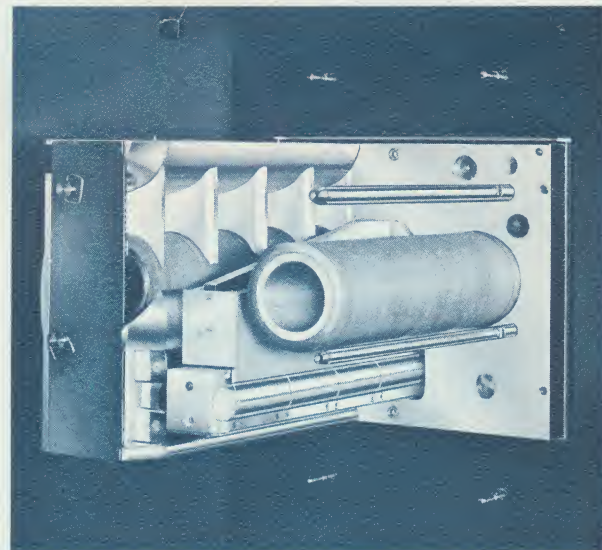


Figure 10. Multiple Drive Block Assembly with One Group of Drive Blocks Removed

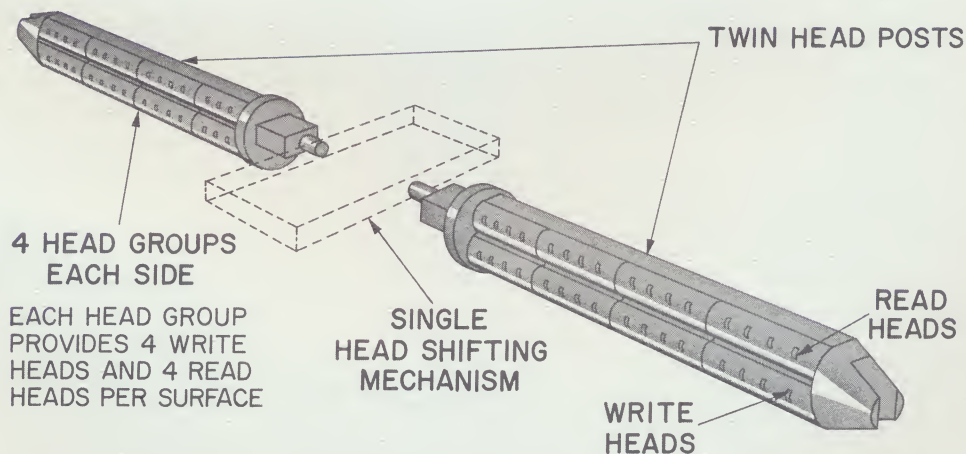


Figure 11. Write/Read Head Post

### HEAD POST ASSEMBLY

All of the write/read heads are mounted in a common head post located between the two rows of tape loops in each group. The position of the head post can be seen in Figure 10. The general arrangement of the head post itself is as shown in Figure 11. The lower row of heads provides the writing function and the upper row the reading function. The heads are arranged in sections so that four writing and four reading heads are presented to each of the recording surfaces. A similar arrangement prevails on the other

common vacuum supply is connected to all of the buffer chambers so that all loops are engaged in the driving position simultaneously, as part of the automatic load cycle. The twin capstans run in specially designed long-life bearings. Figure 10 shows the appearance of the drive assembly with one group of drive blocks removed to provide access to the head post. The vacuum and pressure porting can be seen and also the location of the capstan threading the remaining group of drive blocks. There are sixteen drive block sections in all, providing a 16 loop drive.

side of each head post to furnish reading and writing functions for the alternate group of loops.

The profile of the head post is contoured with a smooth surface finish to define the desired stable flying attitude for the tape. The head post forms a rigid beam structure which permits the heads to be traversed over the recording surfaces under the control of the head post positioning mechanism. Both head posts move simultaneously under the control of a single positioning mechanism.



## HEAD POSITIONING MECHANISM

Because the head positioning system demands only a linear movement of a single assembly over a very short distance, a simple mechanism is possible. This takes the form of a binary input positioning linkage sometimes referred to as a "whiffletree." A diagrammatic representation of the head positioning mechanism showing linkage relationships is given in Figure

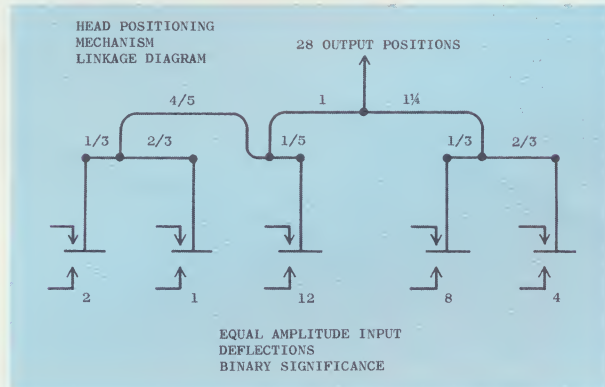


Figure 12. Diagrammatic Representation of Head Positioning Mechanism Showing Linkage Relationships

## PERFORMANCE CHARACTERISTICS

The average access time to any stored record at random is made up of the average head positioning time plus an average latency time of one half revolution of the recording medium.

Check reading is performed immediately after writing. It is not necessary for the recording medium to make an extra revolution to check read, as required in other random access devices.

12. Five equal amplitude input deflections acquire binary weightings of  $2^0 - 2^4$  and from the linkage relationships provide 32 precisely repeatable positions of the head post with very fast head shifting. Of these 32 positions 28 are actually required for positioning the head; the remaining four are electronically ignored by the equipment. The actual head positioning mechanism is shown in Figure 13.

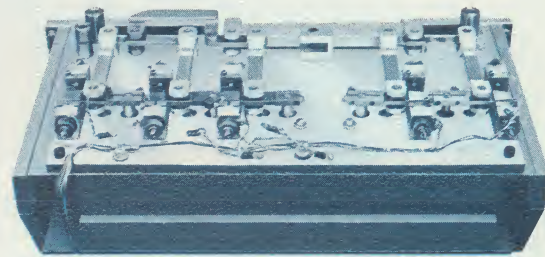


Figure 13. Head Positioning Mechanism

This is illustrated by the characteristic shown in Figure 14. At point A the first access to a record has been achieved in time  $T_1$ . Normally the time  $T_1$  would elapse before check reading could be carried out at point B. The characteristic RAM operation follows line AB, check reading at B still being achieved in time  $T_1$  plus the very small increment of time which elapses due to gap spacing. The elimination of wait time for check reading results in higher processing rates.

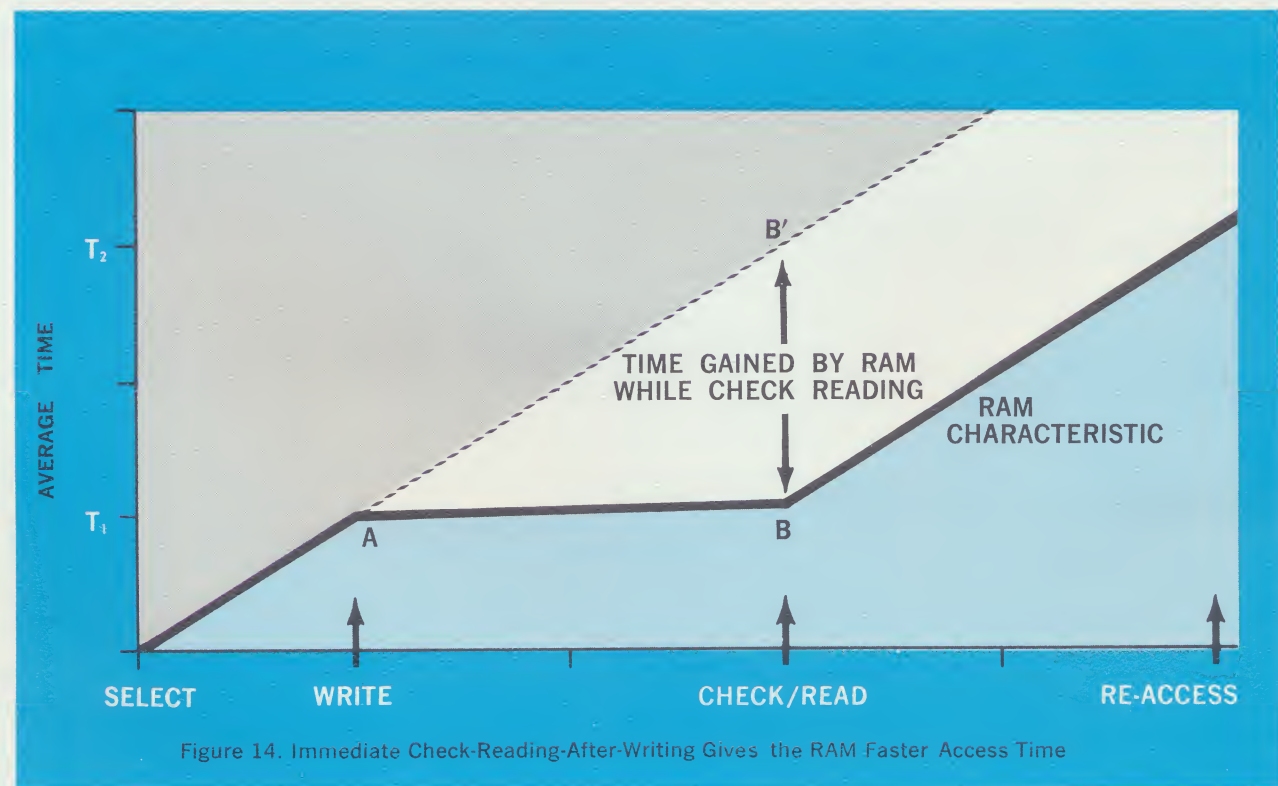


Figure 14. Immediate Check-Reading-After-Writing Gives the RAM Faster Access Time

## PERFORMANCE CHARACTERISTICS

*continued*

### DATA SECURITY

As the design approach of the RAM is reviewed feature by feature, it becomes obvious that a vital supplement to the higher performance/price ratio is the new order of data security that is realized. The use of a flexible recording medium eliminates machine damage and information loss resulting from head and disk crashes encountered in other random access memories. The sealed cartridges do not require the rigorous and elaborate machine room procedures which are essential to establish confidence in disk cartridge storage.

Spare tracks on the recording surfaces are unnecessary. Under normal conditions, the tape loops are practically indestructible and it is possible to recover data even in the extreme case of catastrophic damage to a cartridge housing.

### SIMPLE MAINTENANCE

The maintenance required to insure reliability is reduced to a minimum and made exceptionally convenient and quick. After sliding back the transparent machine cover, drive blocks can be removed from their mountings after unfastening only two captive screws. This exposes the head post completely in a few seconds. The conveniently laid out components are all easily accessible in the frame assembly of the unit, which has removable cover panels.

### EQUIPMENT

The complete Model TLM-4550 RAM System comprises:

- 1 — Free-standing cabinet of welded box frame construction with removable cover panels
- 2 — Faceplates, each with eight drive block assemblies and twin loop drive capstans

- 2 — Read/Write head post assemblies, each with eight groups of four Read and Write head pairs per group
- 2 — Cartridge loading assemblies with motor drive
- 1 — Head positioning mechanism
- 1 — Capstan drive system

Logic level interface electronics, including Write amplifier, Read amplifier, track addressing system, with address register and associated power supply.

All local controls, interlocks and auxiliary equipment associated with machine functions, including automatic load cycle control, air pressure and vacuum generators.

The equipment is furnished complete with all controls, indicators and internal wiring and ready for interconnection and operation with a suitable control unit.

### TAPE PACK CARTRIDGE

Tape Pack cartridges may be supplied on special order to cover a range of storage capabilities. RAM Model TLM-4550 accepts Model ACC-8601 Tape Pack Cartridges which contain 8 tape loops, each 30 inches in length and 2 inches in width. Storage capacity of the ACC-8601 cartridge is in excess of 25.1 million bits. All channels have equal storage capacity and equal bit packing density.

Complete specification for the TLM-4550 and ACC-8601 Tape Pack are given on the following page. For further information, write, wire or call: General Sales Manager, Potter Instrument Company, Inc., 151 Sunnyside Boulevard, Plainview, New York (11803). Telephone: 516 OVERbrook 1-3200. TWX: 516-433-9320. Cable: PICO.



## SPECIFICATIONS

### I. EQUIPMENT SPECIFICATIONS

MEMORY .....	Flexible tape loop memory using dual, interchangeable cartridges
METHOD OF RECORDING .....	Non-contact recording using serial format in multiple unrelated tracks. Potter high-density Write broad/Read narrow configuration
STORAGE CAPACITY	
ON-LINE STORAGE CAPACITY .....	50.2 million bits
CARTRIDGE CAPACITY .....	25.1 million bits
TOTAL CYLINDER CAPACITY (without head movement) .....	1,792,000 bits
SINGLE LOOP CYLINDER CAPACITY (without head movement) .....	112,000 bits
INFORMATION PER TAPE LOOP .....	3.1 million bits
INFORMATION PER TRACK .....	28,000 bits
CARTRIDGE CONFIGURATION	
NUMBER OF TRACKS PER TAPE LOOP .....	112
INFORMATION PACKING DENSITY .....	1000 bits/inch
CIRCUMFERENCE OF TAPE LOOP .....	30 inches
RECORDING LENGTH OF TAPE LOOP .....	28 inches
TAPE WIDTH .....	2 inches
NUMBER OF LOOPS PER CARTRIDGE .....	8
NUMBER OF CARTRIDGES PER RAM .....	2

#### HEAD CONFIGURATION

Separate Read and Write heads permit immediate check-reading-after-writing.

#### OPERATION TIMES

AVERAGE ACCESS TIME .....	87.5 ms
AVERAGE HEAD POSITIONING TIME .....	62.5 ms
MAXIMUM HEAD POSITIONING TIME .....	85.0 ms
MINIMUM HEAD POSITIONING TIME .....	45.0 ms
AVERAGE LATENCY TIME .....	25.0 ms
FULL REVOLUTION TIME .....	50.0 ms
CHECK-READ LATENCY TIME .....	0.5 ms
AVERAGE CHECK-READ-AFTER-WRITE CYCLE TIME .....	88.0 ms
DATA TRANSFER RATE .....	600 kc/s
TAPE SPEED .....	600 inches/sec

POWER ..... 110/120V or 220/440V, 50/60 cps

#### DIMENSIONS

CARTRIDGE, ACC-8601 (8 loops, 25.1 million bits of on-line capacity) .....	13" W x 22" H x 8" D
RAM, TLM-4550 (16 loops, 50.2 million bits of on-line capacity) .....	46" W x 50" H x 25½" D

### II. ENVIRONMENTAL SPECIFICATIONS

#### OPERATING

TEMPERATURE RANGE .....	40°F to 100°F (5°C to 38°C)
HUMIDITY RANGE .....	30% RH to 90% RH, no condensation

#### STORAGE AND TRANSIT (Equipment and Cartridge)

TEMPERATURE RANGE .....	-20°F to +140°F (-30°C to +60°C)
HUMIDITY RANGE .....	Up to 98% RH, no condensation

### III. MODES OF OPERATION AND CONTROL SIGNALS

#### SIGNALS TO UNIT

TRACK LOCATE (16 loop system) .....	parallel input comprising 11 binary bits
WRITE ENABLE .....	Control Signal (level)
DATA INPUT .....	Serially at selected frequency

#### SIGNALS FROM UNIT

EQUIPMENT READY .....	DC level = 6 volts in ready condition
-----------------------	---------------------------------------

## About POTTER®

**POTTER WORLDWIDE FIELD SERVICE AND LOGISTICS PROGRAM** — Repair centers in strategic locations within the continental United States and abroad have been established to support the entire Potter product line.

Staffed by highly-trained field representatives, these repair centers are equipped to effect on-site installation of equipments and to perform quality repair, maintenance and overhaul.

Supplementing this capability, if a customer prefers to provide his own equipment support, Potter has established standard instruction courses to train customer personnel, either at Potter or in the field.

A Spare Parts Department, backed up by an extremely large inventory and streamlined order processing, is available for customer convenience and economy. This inventory permits the customer to realize virtual elimination of downtime as well as savings on spare parts dollars by offering expeditious delivery for replaceable parts. Delivery is available in 24 hours to meet customer emergency requirements—within 72 hours for standard parts under normal conditions. Potter also offers provisioning and logistics capabilities to meet all existing military specifications.

The Potter field service and logistics program is one of the finest in the EDP equipment industry. With reliable, quality-engineered equipment, supported by comprehensive field service, Potter guarantees satisfaction.



**POTTER PLANTS** — Tape transport production is carried on in this modern 62,000 sq. ft. plant on Sunnyside Boulevard, Plainview, New York. Building also houses corporate offices, sales, engineering and research groups.

East Bethpage Road plant (below), completed in 1963, produces high-speed printers. A third plant in Luquillo, Puerto Rico, manufactures magnetic and photoelectric recording and playback heads. Total manufacturing space in all Potter plants exceeds 110,000 sq. ft.

Present Potter employment is in excess of 650 people.



### SALES OFFICES

**Potter Instrument Company, Inc.**  
151 Sunnyside Boulevard  
Plainview, Long Island, New York  
(516) OVERbrook 1-3200  
TWX: 516-433-9320  
CABLE: PICO

**Potter Instrument Company, Inc.**  
Los Angeles (La Canada), Calif.  
1041 Foothill Boulevard  
(213) MURray 1-5845  
TWX: 213-790-7847

**Potter Instrument Company, Inc.**  
Phoenix, Arizona  
(602) ENTERprise 150

### INTERNATIONAL SALES

**Potter Instrument Company, Limited**  
McGraw-Hill House  
Shoppenhangers Road  
Maidenhead, Berkshire, England  
Telephone MAidenhead 20361  
CABLE: PICO MAIDENHEAD



**POTTER INSTRUMENT COMPANY, INC.**

151 SUNNYSIDE BOULEVARD • PLAINVIEW, NEW YORK • 516 OVERBROOK 1-3200





**POTTER INSTRUMENT COMPANY, INC.**

® 151 Sunnyside Boulevard • Plainview, New York • Overbrook 1-3200

Dear Sir:

Thank you for your recent inquiry.

The revolutionary new RAM® is a new cartridge loaded random access memory system which establishes a breakthrough in random access memories. The RAM is a fast access device having an on-line capacity in excess of 50 million bits of information, and is 30% faster in all modes of operation than any presently used system.

The RAM is the first cartridge loaded random access memory system to provide an immediate check-read-after-write capability. Check reading is performed immediately after writing: It is not necessary for the recording medium to make an additional full revolution to check read, as is required in other memories.

A unique drive system permits the use of high density magnetic tape loops as the recording medium. In contrast to magnetic disks used in other memories, the flexible substrate eliminates the need for critical mechanical adjustments and results in a lower-cost package as well as one much less susceptible to damage. There is no danger of data loss due to rough handling. "Handle with care" treatment associated with conventional disk cartridges is completely eliminated. This feature is essential in any retrieval system for the security of vital company records.

The RAM is available at prices far below other random access memories.

Call Potter or your computer supplier for further information about this revolutionary new storage and retrieval system.

Very truly yours,

POTTER INSTRUMENT COMPANY, INC.

*William P. Sharpe*

William P. Sharpe  
General Sales Manager

P.S. For further details, complete the enclosed reply card!



NO POSTAGE STAMP  
NECESSARY  
IF MAILED IN  
THE UNITED STATES

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 579, PLAINVIEW, N. Y. (11803)

POSTAGE WILL BE PAID BY


**POTTER INSTRUMENT COMPANY, INC.**

*151 Sunnyside Boulevard*

*Plainview, New York 11803*

ATTN.: GENERAL SALES MANAGER

**FOR MORE INFORMATION**  
*on POTTER products*  
*fill out and send the*  
*attached card. (Over)*





T0: General Sales Manager  
Potter Instrument Company, Inc.

**Check One**

- ☐ I have a current need for a low-cost, high capacity, fast access random access memory.
- ☐ I expect to have a future need for a low-cost random access memory.
- ☐ I would need a control and coupler unit to enable the RAM to be used with a \_\_\_\_\_ (manufacturer)  
\_\_\_\_\_ computer. Owned ☐ Leased ☐  
(model)

Application \_\_\_\_\_  
\_\_\_\_\_

- ☐ Please have a Sales Engineer call.
- ☐ Send further technical information and prices.
- ☐ Place my name on your mailing list.

Name \_\_\_\_\_ Title \_\_\_\_\_

Company \_\_\_\_\_ Telephone No. \_\_\_\_\_

Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_ Zip # \_\_\_\_\_





## HOME OFFICE

**POTTER INSTRUMENT COMPANY, INC.**  
151 Sunnyside Boulevard  
Plainview, Long Island, New York (11803)  
Phone: (516) Overbrook 1-3200  
TWX: 516-433-9320

## INTERNATIONAL OFFICES

### ENGLAND

**POTTER INSTRUMENT COMPANY**  
McGraw-Hill House  
Shoppenhangers Road  
Maidenhead, Berkshire, England  
Telephone Maidenhead 20361

### CANADA

**MEGATRONIX LTD.**  
1800 Avenue Road  
Toronto 12, Ontario, Canada  
Telephone (416) 783-3329

### JAPAN

**MUNZIG INTERNATIONAL, INC.**  
660 S. Western Avenue  
Los Angeles 4, California 90005  
Telephone (213) DUNKirk 2-1276


**MUNZIG INTERNATIONAL OF JAPAN, INC.**  
19, 2-Chome, Omote-Machi  
Akasaka, Minato-Ku,  
Tokyo, Japan  
Telephone 401-8785, 402-4337

## SUBSIDIARIES

**POTTER INSTRUMENT COMPANY, LTD.**  
McGraw-Hill House  
Shoppenhangers Road  
Maidenhead, Berkshire, England  
Telephone Maidenhead 20361

**INTERNATIONAL DATA PRODUCTS, INC.**  
Post Office Box 196, Road 3  
Luquillo, Puerto Rico  
Telephone Luquillo 729-2880

**TRANSDUCER CORPORATION**  
Post Office Box 196, Road 3  
Luquillo, Puerto Rico  
Telephone Luquillo 729-2880

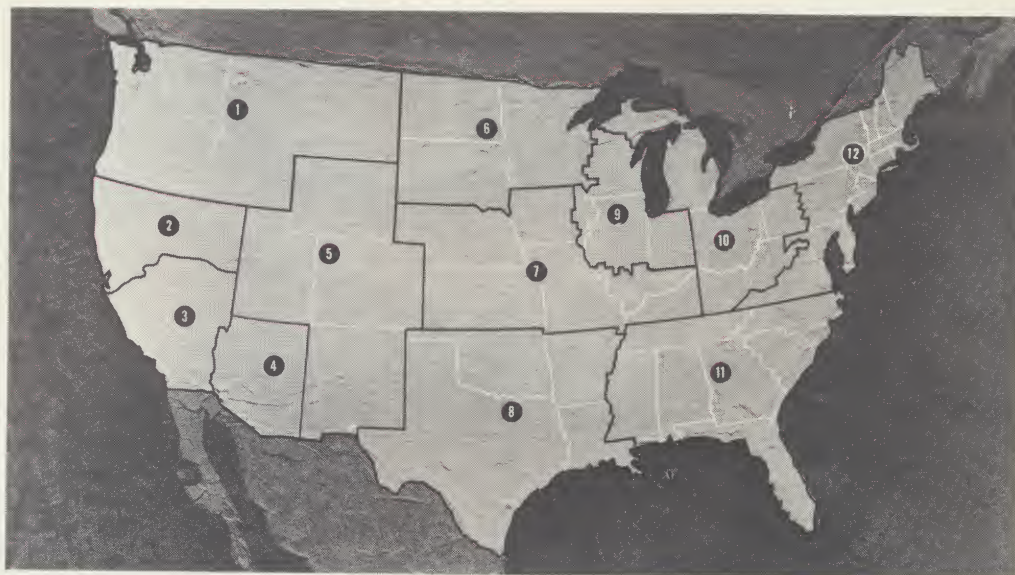

1. THE CALMA COMPANY  
Santa Clara, California (95050)—346 Mathew Street (408) 244-0960  
Portland 22, Oregon—5124 S. E. Rinearson (503) 655-1322
2. POTTER INSTRUMENT COMPANY, INC. Southwest District  
San Gabriel, California—715 E. Mission Drive (213) 283-8177
3. POTTER INSTRUMENT COMPANY, INC.  
Phoenix, Arizona—(602) ENTERprise 150
4. KELLEY ENTERPRISES  
El Paso, Texas—5432 Vancouver Street—(915) 751-3843  
Loveland, Colorado—336 East Fourth Street—(303) 667-1376
5. POTTER INSTRUMENT COMPANY, INC. Minnesota District  
Minneapolis, Minnesota (55424)—7701 Normandale Road—(612) 920-4973
6. DESIGN & SALES ENGINEERING COMPANY  
Kansas City, Missouri (64133)—3506 N.W. 58th Terrace (816) SH 1-0468  
St. Louis, Missouri (63117)—6632 Clayton Road (314) STerling 1-3388
7. CAREY-WOLF COMPANY  
Dallas, Texas—Direct Line (214) TAYlor 3-5383  
Ft. Worth, Texas (76116)—P.O. Box 12425—(817) PFerishing 8-1702  
Houston 60, Texas (77060)—P.O. Box 60338—(713) MISSION 3-2114
8. WALTER F. MARSH & ASSOCIATES, INC.  
(Chicago) Oak Park, Illinois—344 Harrison Street—(312) 383-4728
9. ELECTRO SALES ASSOCIATES, INC.  
Cleveland, Ohio (44119)—335 East 200 Street—(216) 486-1140  
Dayton, Ohio (45420)—Dabel Station, Box 143—(513) 426-5551  
Detroit, Michigan (48224)—15324 Mack Avenue—(313) 886-2280  
Pittsburgh, Pennsylvania (15235)—201 Penn Center Boulevard (412) 371-9449
10. ROY ATTAWAY COMPANY  
Huntsville, Alabama (35801)—900 Bob Wallace Avenue, S.W.—(205) 534-2811  
Orlando, Florida (32801)—51-53 East Robinson Street—(305) GARDen 4-9983  
Winston-Salem, North Carolina—519 Nissen Building—(919) 722-9671
11. POTTER INSTRUMENT COMPANY, INC. Northeast District  
Boston, Massachusetts (Enterprise 0238) or (516) OV 1-3200  
Reston, Virginia—11499 Waterview Cluster—(202) 737-1174  
Plainview, Long Island, New York (11803)—151 Sunnyside Boulevard (516) OV 1-3200